




# HECO-FIX-plus®

THE PATENTED MULTI-MATERIAL SCREW  
FOR LOTS OF APPLICATIONS

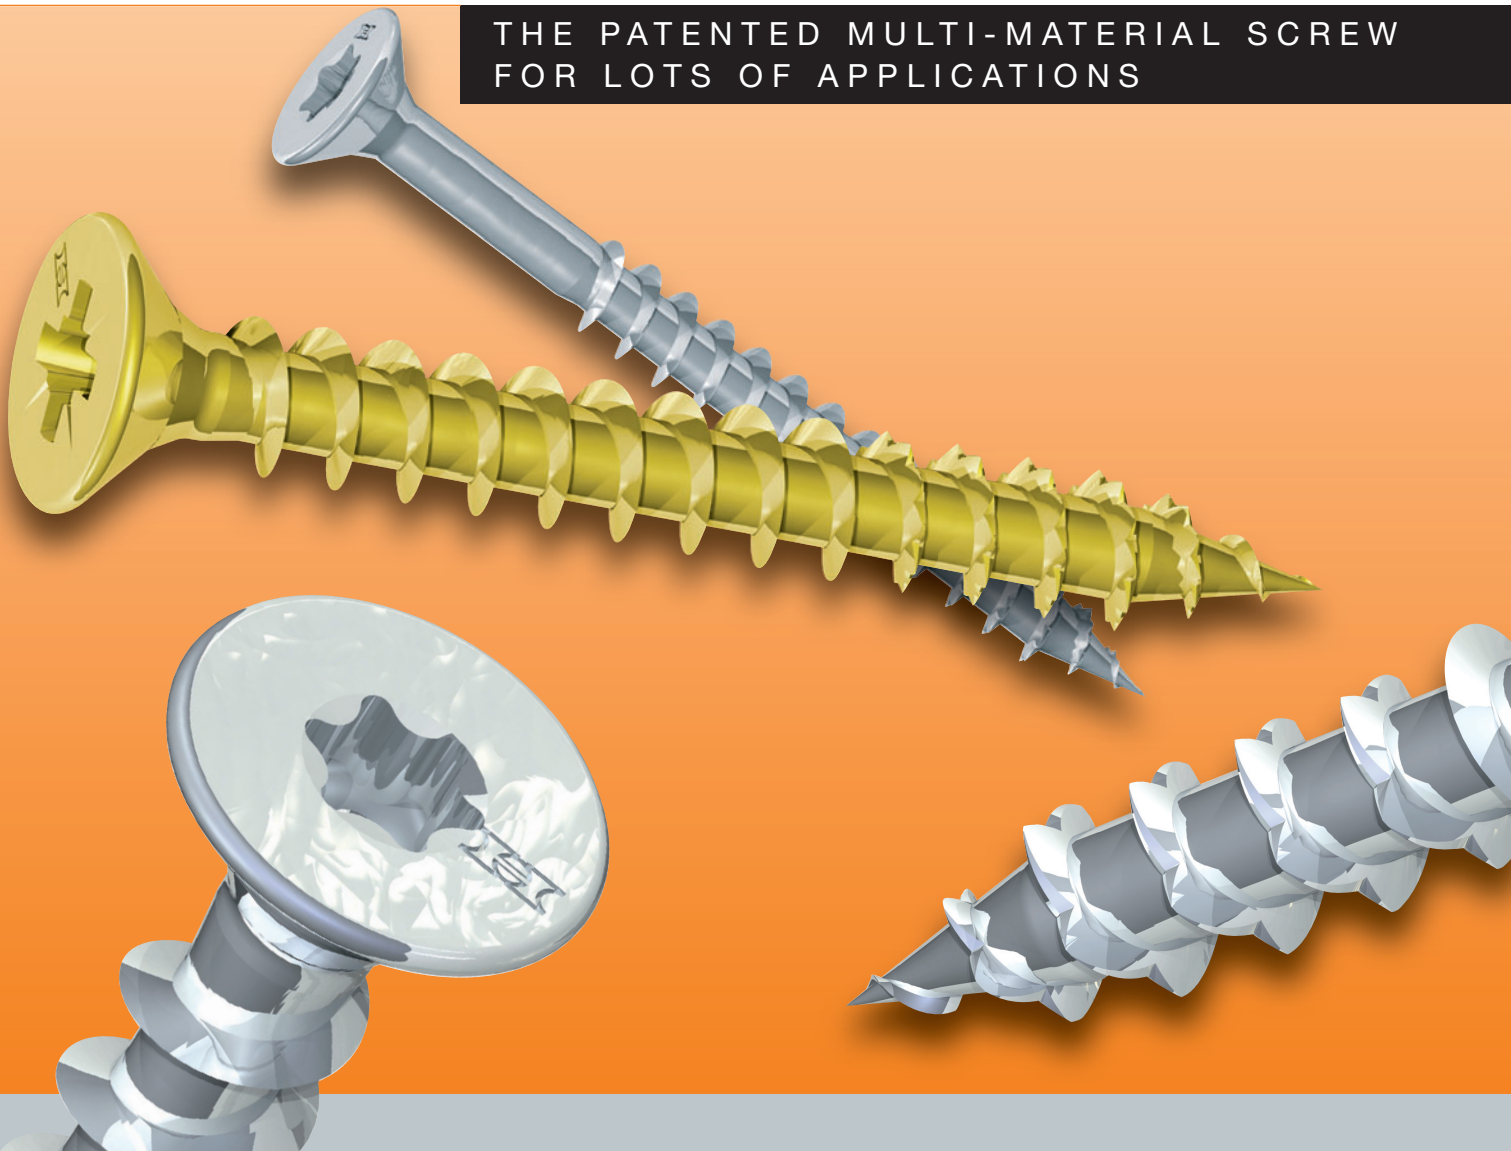


## Advantages

- One screw for many applications
- Ideal for all natural and manufactured woods, plastic, masonry and thin sheet metal
- Can be used in conjunction with nylon plugs
- Very low driving torques
- professional range of pack sizes for all
- Approved and monitored product




Safe and secure

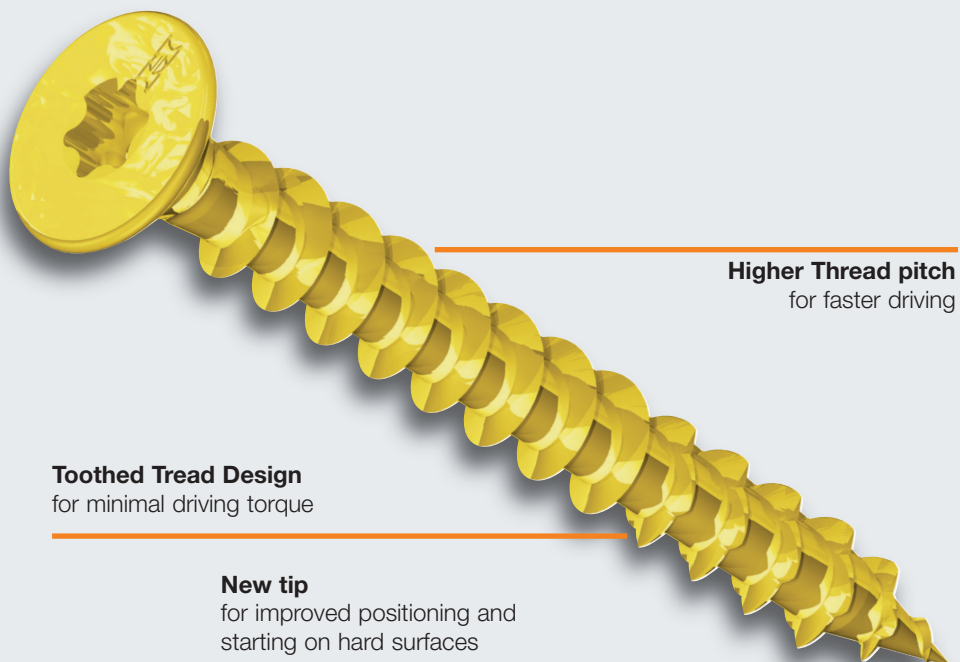

**Higher Thread pitch**  
for faster driving

**Toothed Tread Design**  
for minimal driving torque

**New tip**  
for improved positioning and  
starting on hard surfaces




**Countersunk, full/part threaded  
zinc plated bright/yellow, coated**  
PZ-drive, Length (mm): 10 to 200  
Diameter (mm): 2,5 / 3,0 / 3,5 / 4,0 / 4,5 / 5,0 / 6,0  
T-drive, Length (mm): 12 to 300  
Diameter (mm): 2,5 / 3,0 / 3,5 / 4,0 / 4,5 / 5,0 / 6,0




**Countersunk with milled ribs  
zinc plated yellow, coated**  
T-drive, Length (mm): 30 to 240  
Diameter (mm): 3,5 / 4,0 / 4,5 / 5,0 / 6,0




**Countersunk with centre drilled hole, full threaded  
bright zinc plated, coated**  
PZ-drive, Length (mm): 20 to 80  
Diameter (mm): 4,0 / 4,5 / 5,0



**Reduced Countersunk, full threaded  
zinc plated bright/yellow, coated**  
PZ-drive, Length (mm): 10 to 40  
Diameter (mm): 3,0 / 3,5 / 4,0




**Pan head, full threaded  
zinc plated bright/yellow, coated**  
PZ-drive, Length (mm): 10 to 80  
Diameter (mm): 2,5 / 3,0 / 3,5 / 4,0 / 4,5 / 5,0 / 6,0  
T-drive, Length (mm): 12 to 60  
Diameter (mm): 3,0 / 3,5 / 4,0 / 4,5 / 5,0 / 6,0



**Raised Countersunk, full threaded  
zinc plated bright/yellow, coated**  
PZ-drive, Length (mm): 12 to 60  
Diameter (mm): 3,0 / 3,5 / 4,0 / 4,5 / 5,0 / 6,0  
T-drive, Length (mm): 12 to 60  
Diameter (mm): 3,0 / 3,5 / 4,0 / 4,5 / 5,0



**Backwall-screws, full threaded  
bright zinc plated, coated**  
PZ-drive, Length (mm): 20 to 60  
Diameter (mm): 3,0 / 3,5 / 4,0 / 4,5 / 5,0



**Countersunk, full/part threaded  
A2 stainless steel, coated**  
PZ-drive, Length (mm): 16 to 120  
Diameter (mm): 3,0 / 3,5 / 4,0 / 4,5 / 5,0 / 6,0  
T-drive, Length (mm): 16 to 240  
Diameter (mm): 3,0 / 3,5 / 4,0 / 4,5 / 5,0 / 6,0




**Pan-head, full threaded  
A2 stainless steel, coated**  
PZ-drive, Length (mm): 20 to 50  
Diameter (mm): 3,0 / 3,5 / 4,0 / 5,0



**Raised countersunk, full threaded  
A2 stainless steel, coated**  
PZ-drive, Length (mm): 16 to 60  
Diameter (mm): 3,0 / 3,5 / 4,0 / 4,5 / 5,0



Diameters 8 and 10 mm on request, for further information feel free to contact us

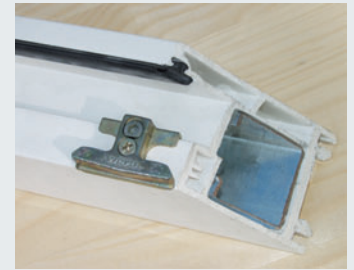

Plastic sections



fixing into masonry



facade



the ideal multi-material screw  
for lots of applications



Fitting furniture



**HECO-Schrauben GmbH & Co. KG**  
Dr.-Kurt-Steim-Straße 28  
D-78713 Schramberg  
Telefon: +49 (0)74 22 / 9 89-0  
Telefax: +49 (0)74 22 / 9 89-200  
E-Mail: info@heco-schrauben.de  
Internet: www.heco-schrauben.de

Your specialist dealer: