
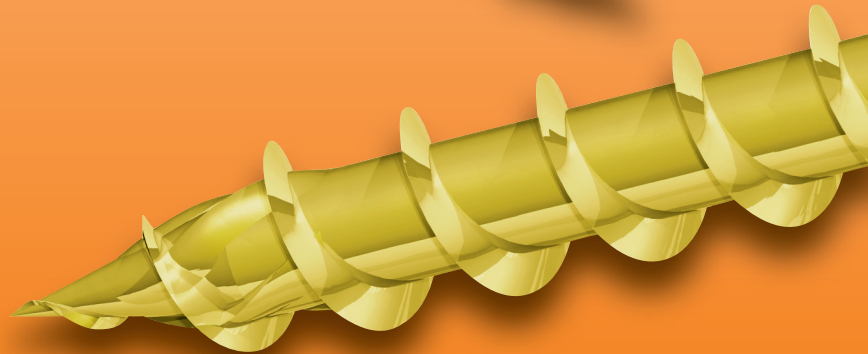


HECO-TOPIX®

THE WOOD SCREW FOR PROFESSIONALS

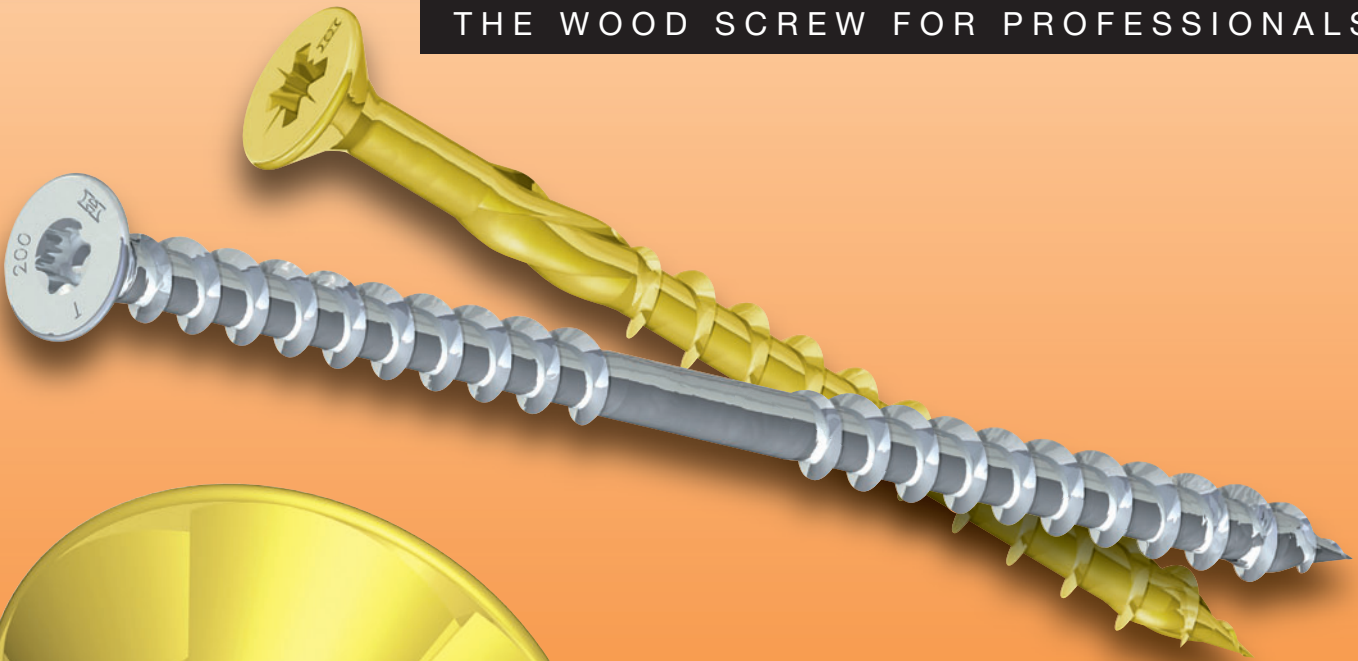


Advantages

- Revolutionary point and shank design
- Easy to handle
- No predrilling required
- Faster driving
- Reduced risk of splitting the wood
- Lower driving torque
- Technical approval for steel and stainless steel versions
- Assessed to BS EN 14592:2008 by TRADA Technology



Safe and secure

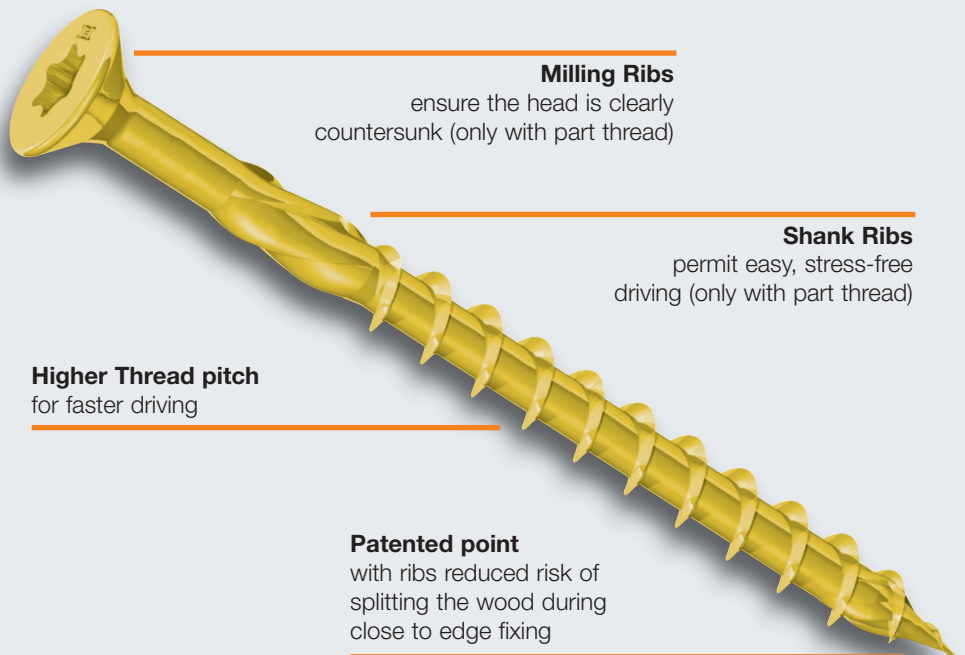

Milling Ribs

ensure the head is clearly countersunk (only with part thread)


Shank Ribs

permit easy, stress-free driving (only with part thread)

Higher Thread pitch
for faster driving

Patented point

with ribs reduced risk of splitting the wood during close to edge fixing




**Countersunk, full/part threaded
zinc plated bright/yellow, coated**
PZ-Drive, Length (mm) 20 to 300
Diameter (mm): 3,5 / 4,0 / 4,5 / 5,0 / 6,0
T-Drive, Length (mm) 20 to 300
Diameter (mm): 3,5 / 4,0 / 4,5 / 5,0 / 6,0



**Countersunk, full threaded
A2 stainless steel, coated**
PZ-Drive, Length (mm): 20 to 70
Diameter (mm): 3,5 / 4,0 / 4,5 / 5,0




**Countersunk with milled ribs, part threaded
A2 stainless steel, coated**
T-Drive, Length (mm) 30 to 300
Diameter (mm): 3,5 / 4,0 / 4,5 / 5,0 / 6,0



**Glass-Strip Screw, Countersunk with milled ribs
part threaded, zinc plated bright/yellow**
T-drive, Length (mm) 30 to 60
Diameter (mm): 3,5




**Decking-Screw, Countersunk with ribs, part threaded
A2 stainless steel, coated**
T-drive, Length (mm) 40 to 80
Diameter (mm): 5,0




**Decking-Screw, Countersunk with secondary thread
A2 stainless steel, DS-coated**
T-drive, Length (mm) 40 to 80
Diameter (mm): 5,0



HECO-TOPIX® Wood Screws



**Countersunk with milled ribs, part threaded
zinc plated yellow, coated**
T-drive, Length (mm): 40 to 400
Diameter (mm): 8,0 / 10,0



**Flange Head, full/part threaded
zinc plated yellow, coated**
T-drive, Length (mm): 40 to 400
Diameter (mm): 6,0 / 8,0 / 10,0



**Countersunk with milled ribs, part threaded
A2 stainless steel, coated**
T-drive, Length (mm): 80 to 400
Diameter (mm): 8,0



**Flange head, full threaded
A2 stainless steel, coated**
T-drive, Length (mm): 80 to 120
Diameter (mm): 8,0



**HECO-TOPIX®-CC CombiConnect, Cap head
DP-Coated**
T-drive, Length (mm): 100 to 400
Diameter (mm): 6,5 / 8,5



**Countersunk with secondary thread, milled ribs
bright zinc plated, coated**
T-drive, Length (mm): 200 to 450
Diameter (mm): 8,0



For further information feel free to contact us



**Timber construction
(timber-frame-houses)**



Staircase construction



fixing of decking



On-rafter insulation



**Clean driving without
pre-drilling or countersinking**



HECO-Schrauben GmbH & Co. KG
Dr.-Kurt-Steim-Straße 28
D-78713 Schramberg
Telefon: +49 (0)74 22 / 9 89-0
Telefax: +49 (0)74 22 / 9 89-200
E-Mail: info@heco-schrauben.de
Internet: www.heco-schrauben.de

Your specialist dealer: