


introducing the new



timberfix

landscaping screws range

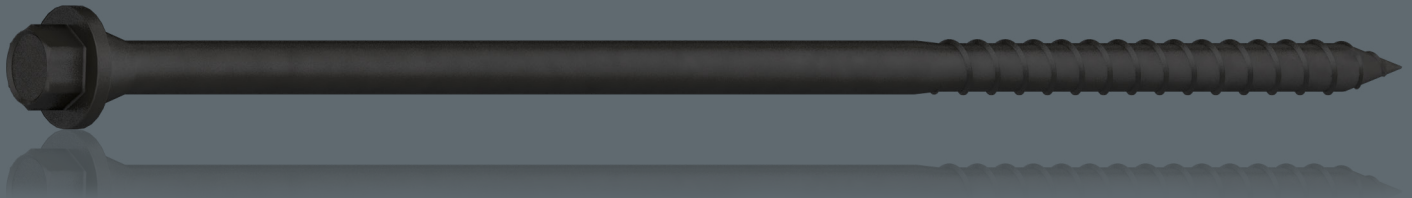


Our new landscaping range is here!

- ⊗ Specially engineered for UK timber sizes
- ⊗ Complies with **RoHS & REACH**
- ⊗ Special steel moves with the wood
- ⊗ Large diameter head improves resistance to head pull through
- ⊗ Up to 1000 salt spray resistant in black for moderate outdoor use*
- ⊗ 8mm hex flange head
- ⊗ Ideal for landscaping and garden buildings, Non-structural use only

* avoid areas of immersion and marine environments, indirect moisture only.
Specify stainless steel if in doubt and when using in acidic timbers like oak.

Call our office: **+44 (0) 1773 740 410** or contact your representative for more details and samples

perfectly
partnered with
our timberfix
decking
screw

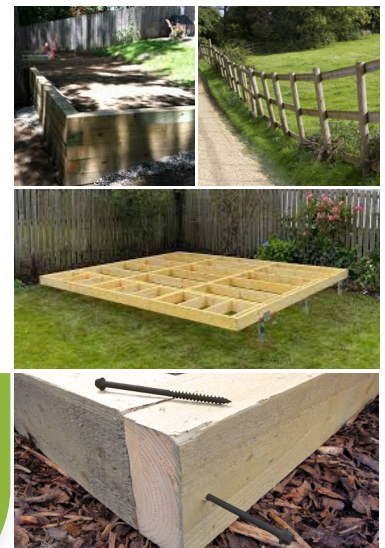

Diameter	Length	Drive	Head Diameter	Thread Length
6.3mm	90mm	Hex 8mm	12mm	56mm
6.3mm	100mm	Hex 8mm	12mm	56mm
6.3mm	125mm	Hex 8mm	12mm	56mm
6.3mm	150mm	Hex 8mm	12mm	56mm
6.3mm	200mm	Hex 8mm	12mm	56mm
6.3mm	250mm	Hex 8mm	12mm	56mm

