




Multi Monti[®] Stainless Steel

The innovative screw anchor for concrete and masonry

PRODUCT INFORMATION

- Fast and easy mounting, no spreading effect, therefore small spacing and edge distances possible
- Use of power tools is allowed as no tightening torque is required. Safe handling, hidden fixation errors are not possible
- Available in stainless steel A4 1.4401 stainless steel HCR 1.4529 on request
- Approved and monitored product for cracked and non-cracked concrete
- Perfect for professional installation of balconies and balustrades
- No plugs required, taps directly into substrate

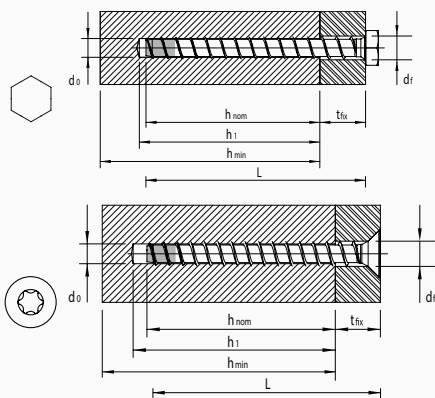

Diameter (d)	Length (l) Range: from - to **	Drive	Head Diameter (dk)	Drill Diameter	ETA
Hex 7.5mm	40mm - 105mm	Hex	SW13	6mm	•
Hex 10mm	65mm - 105mm	Hex	SW16	8mm	•
Hex 12mm	95mm - 135mm	Hex	SW18	10mm	•
Countersunk 7.5mm	40mm - 125mm	T-30	13.6mm	6mm	•
Countersunk 10mm	65mm - 100mm	T-30	13.6mm	6mm	•
Countersunk 12mm	95mm - 130mm	T-30	13.6mm	6mm	•
Pan 7.5mm	40mm - 155mm	T-30	13.6mm	6mm	•

**carbon steel tip not included in load calculations



Head-marking
for easy identification of the anchor

Concrete thread
for interlocking fixations



Phosphated functional tip
ensuring a reliable undercut of the concrete