


HECO-UNIX-top Floorboard Screw

THE UNIQUE FLOORING SCREW WITH
THE CONTRACTION EFFECT



APPLICATION EXAMPLES

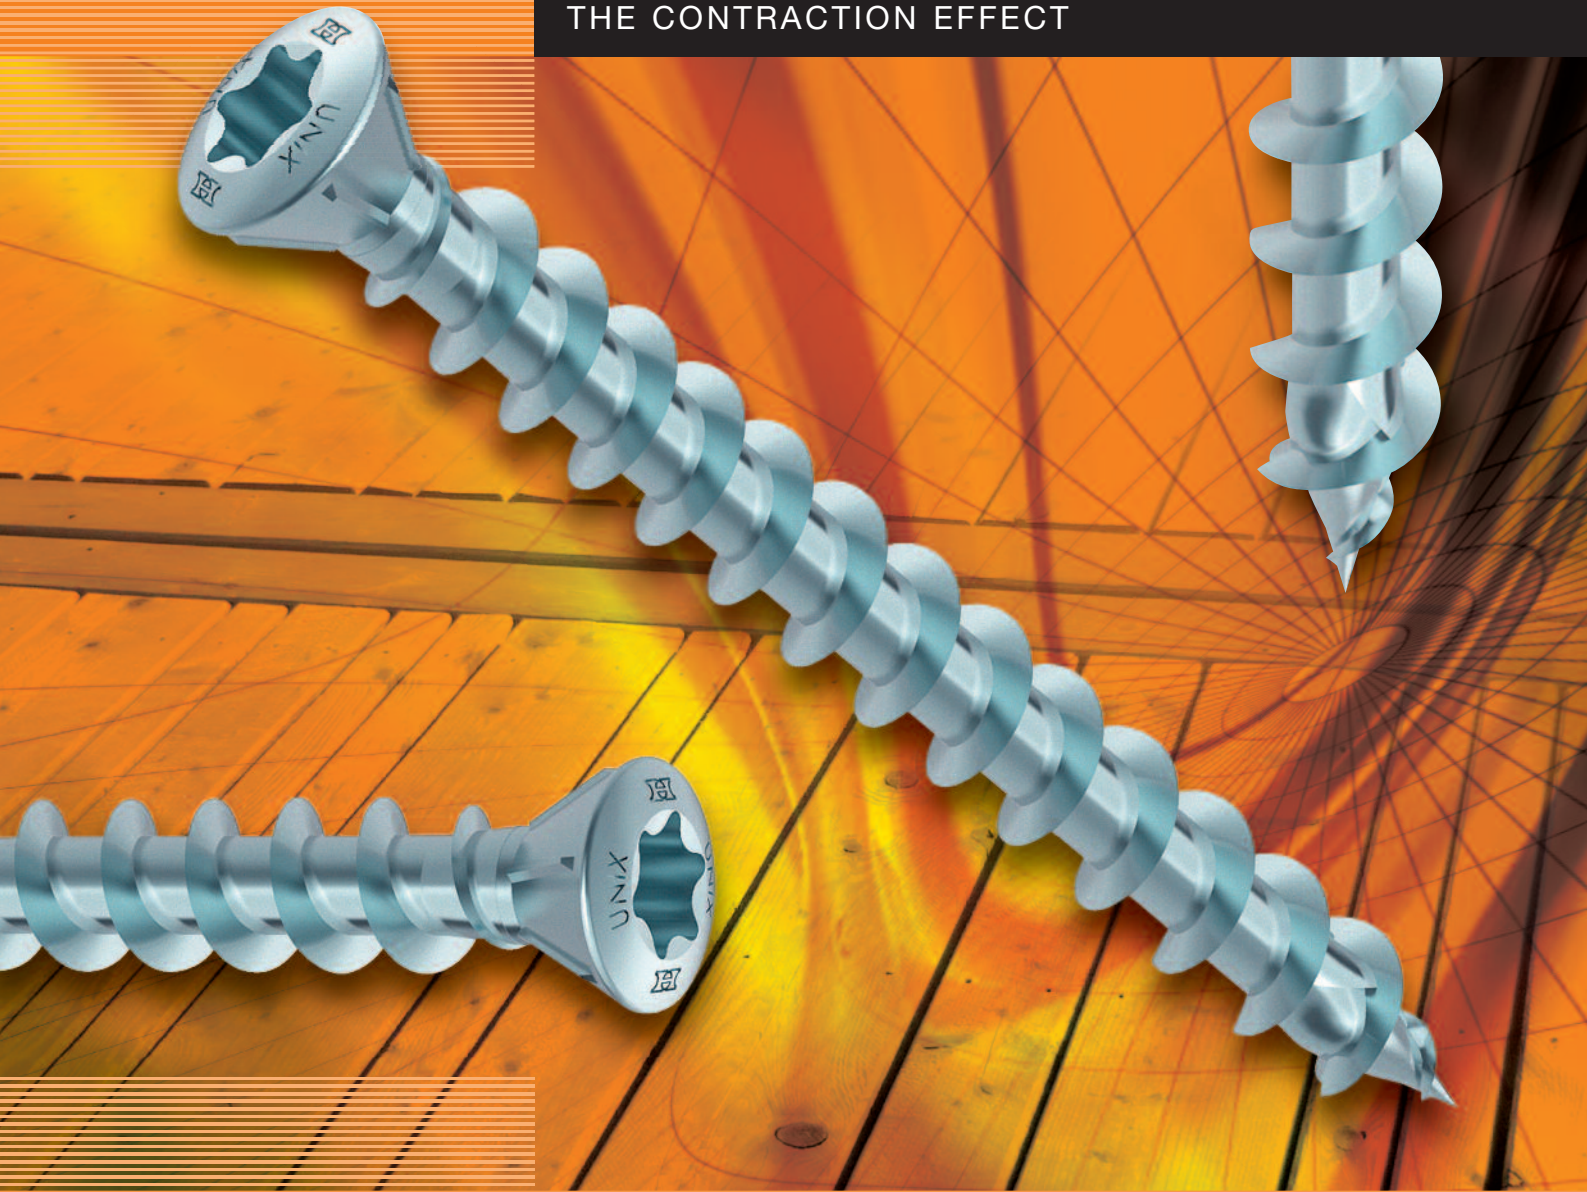

Floor board fastening




Glazing bead installation




Skirting board fastening

CONTRACTION EFFECT

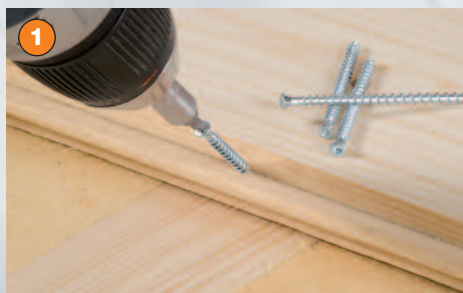

1 The variable pitch of the HECO-UNIX full thread takes hold

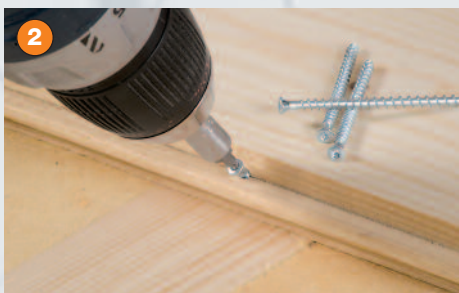

2 The smaller thread pitch means that the boards are clamped firmly together



3 Gap free axial fixing of the timber board via the HECO-UNIX full thread

PRODUCT CHARACTERISTICS

Raised countersunk head with milling ribs and T-drive

- Small head diameter
- Cutting ribs
- Raised head

HECO-UNIX-top full thread

- Contraction effect thanks to the full thread with variable thread pitch
- Axial fixing of component
- Reduced spreading effect thanks to the patented HECO-TOPIX® tip



THE ADVANTAGES

Raised countersunk head with milling ribs and T-drive

- Easy countersinking
- Prevents wood from splitting
- Visually attractive installations

HECO-UNIX-top full thread

- No gaps despite it being a full-threaded screw
- No creaking boards thanks to full-threaded fixation
- Quick, time-saving insertion without predrilling


The flooring screw with the contraction effect

The HECO-UNIX-top has been specially designed for flooring applications. The full thread of the HECO-UNIX-top floorboard screw with its variable thread pitch effectively pulls boards together. The “clamping effect” of the screws draws the board onto the substructure, resulting in a gap-free finish. In addition the thread secures the board axially, which prevents the annoying creaking

sound of the boards “jacking effect”.

Countersinking of the screw head, can be done neatly and easily, due to the under head milling ribs which self-countersink into the surface without splintering the wood around the edge of the screw.

There is no need for pre-drilling and the HECO-UNIX-top floorboard screw meets even the most demanding aesthetic requirements.

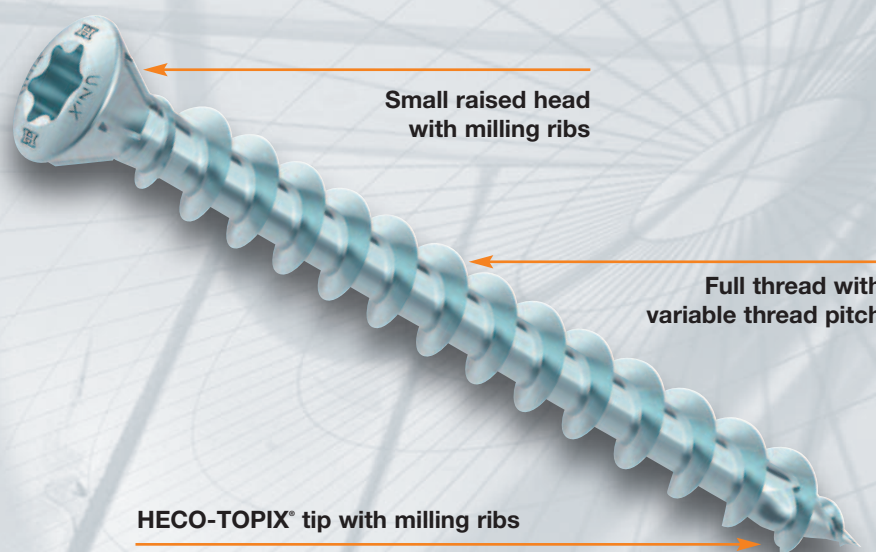

HECO-UNIX-top range: raised countersunk head with milling ribs full threaded, T-Drive, bright zinc plated, coated

D x L (mm)	Article No.	Recess	Box	Packing unit (pcs.)
3,5 x 40	46495	T-10	VAR2	500
3,5 x 50	46498	T-10	VAR3	500
3,5 x 60	46500	T-10	VAR2	200
4,0 x 70	46503	T-15	VAR2	200
4,5 x 50	46506	T-20	VAR2	200
4,5 x 60	46509	T-20	VAR2	200
4,5 x 70	46512	T-20	VAR2	200
4,5 x 80	46515	T-20	VAR3	200



HECO-Schrauben GmbH & Co. KG

Dr.-Kurt-Steim-Straße 28
D-78713 Schramberg
Tel.: +49 (0) 74 22 / 9 89-0
Fax: +49 (0) 74 22 / 9 89-200
E-mail: info@heco-schrauben.de
Internet: www.heco-schrauben.com



Your specialist dealer: